


Era Floor

Panels

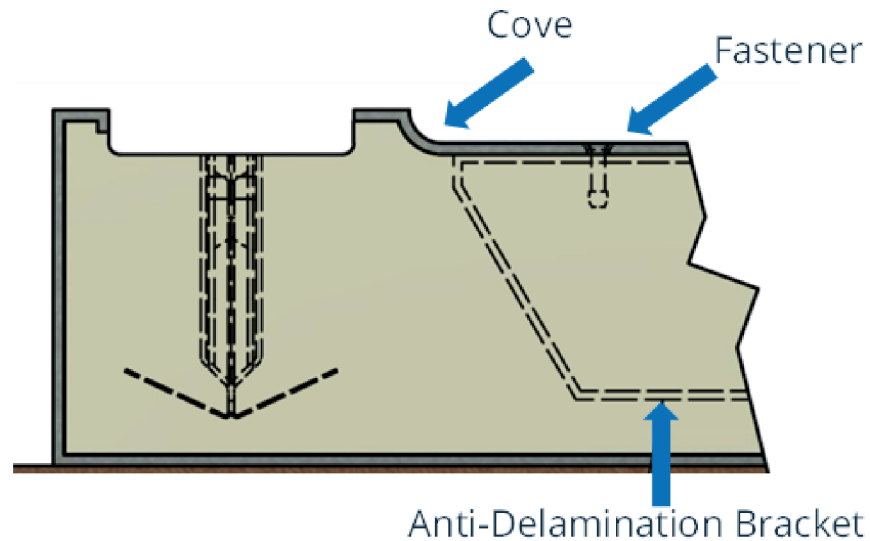

Era Floor

Withstands foot or cart traffic, loads approved up to 1,000 lbs. psf without the need of plywood. Simple floor rating to avoid confusion, rated for foot and cart traffic.

Specification & Features

- 100% foamed-in-place polyurethane panels
 - Tongue and groove construction
 - Locking assemblies
 - Panel gasketing
- Durable bottom skin completes the design
- Radius cove built into the design
- CFC and HCFC Free
- Anti-Delamination Bracket
- Non-wood design
- NSF and UL Certified

Foamed-In-Place Finishes

- .100 Smooth Alum (standard)
- .100 Diamond Treadplate Alum
- 16 Ga Stainless Steel
- 14 Ga Galvanized Steel (must be covered with finished floor for NSF compliance)