

ITEM NO. _____
 PROJECT _____
 LOCATION _____
 DATE _____ QTY. _____

CAPSULE PAK™

Self-Contained Refrigeration Systems

INDOOR COOLERS

- CPB050JC-S-0-EV
- CPB075JC-S-4-EV
- CPB100JC-S-4-EV

INDOOR FREEZERS

- CPF060JC-S-4-EV
- CPF075JC-S-4-EV
- CPF100JC-S-4-EV
- CPF150JC-S-4-EV
- CPF200JC-S-4-EV

OUTDOOR COOLERS

- CPB050JC-E-0-EV
- CPB075JC-E-4-EV
- CPB100JC-E-4-EV

OUTDOOR FREEZERS

- CPF060JC-E-4-EV
- CPF075JC-E-4-EV
- CPF100JC-E-4-EV
- CPF150JC-E-4-EV
- CPF200JC-E-4-EV



Indoor model



Outdoor model



FEATURES

- Condensing unit and evaporator coil contained in a single housing ready to mount on top of your Master-Bilt walk-in
- Indoor and outdoor ceiling mount models
- Available for coolers or freezers
- Systems may be specified for compartments 14' long and under
- Two temperatures: +37°F and -10°F
- Air cooled condensing unit
- R449A refrigerant
- Scroll™ compressors on most models
- Automatic condensate evaporator (indoor models only)
- LogiTemp® electronic controller system
- Electronic control provided for automatic defrost on both coolers and freezers
- All models feature standard cord and plug eliminating the need for field connection
- UL and C-UL electrical listing on complete Capsule Pak refrigeration systems*
- DOE and CARB compliant
- -20°F ambient controls (outdoor models)
- 18 months parts and labor warranty (optional 5 year compressor warranty available)

OPTIONS

(Most options available two weeks from receipt of order. Please contact us for specific questions)

- Heater kit for outdoor use with medium temp applications where ambient conditions may go below 32°F
- Electric vaporizer (indoor models only)
- Five year compressor warranty

* C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.

SYSTEM SPECIFICATIONS

Capsule Pak refrigeration systems consist of a single assembly pre-charged condensing unit and evaporator coil factory assembled, wired, tested and ready for insertion into a factory prepared walk-in ceiling opening.

The Capsule Pak system has a flush coil which keeps all components outside the walk-in storage area, allowing more storage inside. Ceiling mount models are available indoor or outdoor installations. Models are available for interior compartment design temperatures of +37°F and -10°F. Temperatures are adjustable via electronic control. Installation is fast and easy with no plumbing required on indoor units.


The evaporator section is designed to be located entirely outside the walk-in with no intrusions into the refrigerated space. The evaporator enclosure is constructed utilizing

foamed-in-place polyurethane insulation and equipped with a removable, gasketed access cover. Capsule Pak models use high efficiency EC evaporator fan motors to circulate air throughout the walk-in.

All indoor Capsule Pak models are equipped with either a discharge gas condensate vaporizer or an optional electric condensate vaporizer. All outdoor Capsule Pak models are equipped with low ambient controls consisting of crankcase heater and flooded condenser head pressure control.

All standard ceiling mount Capsule Pak refrigeration systems are UL and C-UL listed and DOE compliant. Note: Allow minimum of 4" clearance above and 24" on each side of the Capsule Pak system for installation. Consideration should be given to accessibility for service and free condenser air flow. Consult factory with installation questions.

PHYSICAL SPECIFICATIONS

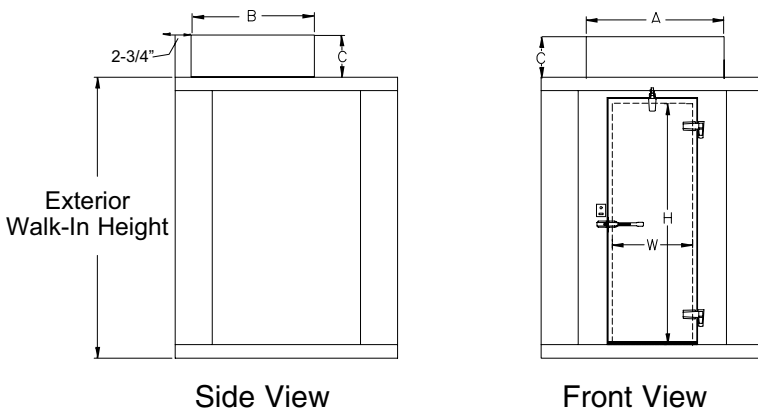

| DOOR OPENING SIZE | | |
|-------------------|-----|------------|
| W | H | MODEL |
| 26" | 66" | STD Series |
| 26" | 78" | 74 Series |
| 26" | 78" | 77 Series |

| CEILING MOUNT MODEL NO. | "A" | "B" | "C" |
|-------------------------|---------|---------|---------|
| CPB050JC-*-0-EV | 41-1/8" | 50-1/2" | 20-5/8" |
| CPB075JC-*-4-EV | 41-1/8" | 50-1/2" | 20-5/8" |
| CPB100JC-*-4-EV | 41-1/8" | 50-1/2" | 20-5/8" |
| CPF060JC-*-4-EV | 41-1/8" | 50-1/2" | 20-5/8" |
| CPF075JC-*-4-EV | 41-1/8" | 50-1/2" | 20-5/8" |
| CPF100JC-*-4-EV | 41-1/8" | 50-1/2" | 20-5/8" |
| CPF150JC-*-4-EV | 45-3/4" | 53-3/8" | 24-3/4" |
| CPF200JC-*-4-EV | 45-3/4" | 53-3/8" | 24-3/4" |

* Insert "S" for indoor model and "E" for outdoor

NOTE:

- Consideration must be given to accessibility for service and free condenser air flow. Consult factory with installation questions.
- Proper condensing unit ventilation must be provided. The factory recommends 200cfm of fresh air in the surrounding area with ample clearance around the condensing unit.
- Subject to change without notice.

SYSTEM TECHNICAL DATA


INDOOR REFRIGERATION SYSTEMS (CORD AND PLUG CONNECTED)

| MODEL | REFRIGERANT | REFRIGERANT CHARGE (OZ) | ELECTRICAL | TOTAL SYSTEM AMPS | TOTAL DEFROST AMPS | NEMA PLUG | AWEF | BTUH* | SHIP WT. (LB/KG) |
|-----------------|-------------|-------------------------|--------------|-------------------|--------------------|-----------|------|-------|------------------|
| CPB050JC-S-0-EV | R-449A | 80 | 115/60/1 | 6.3 | N/A | 5-15P | 5.61 | 4400 | 261/118 |
| CPB075JC-S-4-EV | R-449A | 80 | 208-230/60/1 | 5.6 | N/A | 6-15P | 5.61 | 6366 | 271/123 |
| CPB100JC-S-4-EV | R-449A | 80 | 208-230/60/1 | 7.5 | N/A | 6-15P | 5.61 | 7300 | 275/125 |
| CPF060JC-S-4-EV | R-449A | 80 | 208-230/60/1 | 8.0 | 5.7 | 6-15P | 1.99 | 2250 | 270/122 |
| CPF075JC-S-4-EV | R-449A | 80 | 208-230/60/1 | 8.5 | 5.7 | 6-15P | 2.08 | 3130 | 271/123 |
| CPF100JC-S-4-EV | R-449A | 80 | 208-230/60/1 | 9.6 | 5.7 | 6-15P | 2.11 | 3500 | 275/125 |
| CPF150JC-S-4-EV | R-449A | 80 | 208-230/60/1 | 13.7 | 8.7 | 6-20P | 2.22 | 4509 | 358/162 |
| CPF200JC-S-4-EV | R-449A | 96 | 208-230/60/1 | 14.8 | 8.7 | 6-20P | 2.43 | 6725 | 377/171 |

OUTDOOR REFRIGERATION SYSTEMS (CORD AND PLUG CONNECTED)


| MODEL | REFRIGERANT | REFRIGERANT CHARGE (OZ) | ELECTRICAL | TOTAL SYSTEM AMPS | TOTAL DEFROST AMPS | NEMA PLUG | AWEF | BTUH* | SHIP WT. (LB/KG) |
|-----------------|-------------|-------------------------|--------------|-------------------|--------------------|-----------|------|-------|------------------|
| CPB050JC-E-0-EV | R-449A | 80 | 115/60/1 | 6.3 | N/A | 5-15P | 7.60 | 4115 | 286/130 |
| CPB075JC-E-4-EV | R-449A | 80 | 208-230/60/1 | 5.6 | N/A | 6-15P | 7.60 | 5802 | 296/134 |
| CPB100JC-E-4-EV | R-449A | 80 | 208-230/60/1 | 7.5 | N/A | 6-15P | 7.60 | 6884 | 300/136 |
| CPF060JC-E-4-EV | R-449A | 80 | 208-230/60/1 | 8.0 | 5.7 | 6-15P | 2.89 | 2135 | 285/129 |
| CPF075JC-E-4-EV | R-449A | 80 | 208-230/60/1 | 8.5 | 5.7 | 6-15P | 2.92 | 2875 | 285/129 |
| CPF100JC-E-4-EV | R-449A | 80 | 208-230/60/1 | 9.6 | 5.7 | 6-15P | 2.95 | 3210 | 295/134 |
| CPF150JC-E-4-EV | R-449A | 128 | 208-230/60/1 | 13.7 | 8.7 | 6-20P | 3.03 | 4362 | 378/171 |
| CPF200JC-E-4-EV | R-449A | 128 | 208-230/60/1 | 14.8 | 8.7 | 6-20P | 3.15 | 6350 | 397/180 |

- *BTUH calculated using 90°F ambient.
- Consult factory for application specifics
 - All systems require a single power supply

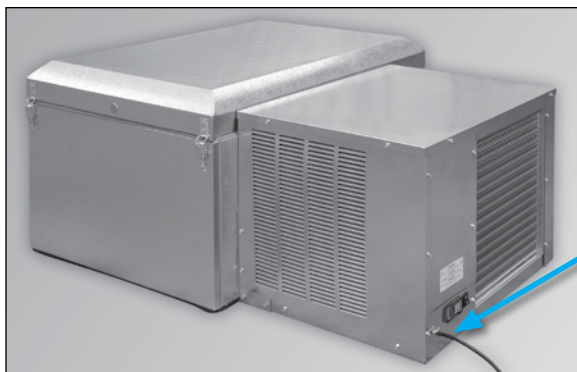

9 ft. long power cord attached to condensing unit section

MODEL NUMBER GUIDE

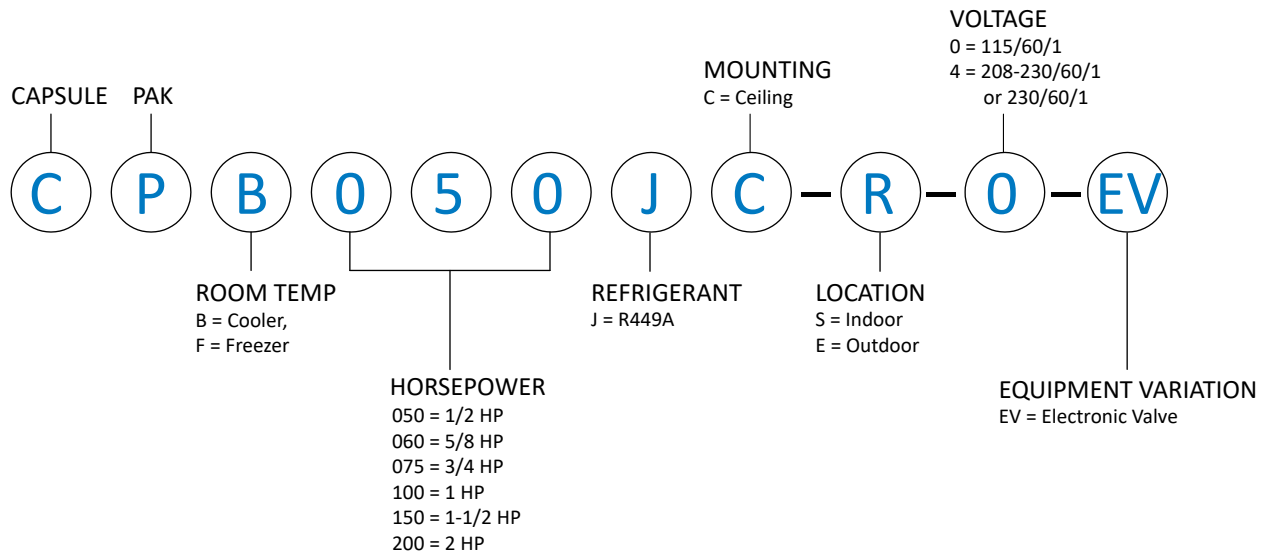

STANDARD LOGITEMP® ELECTRONIC CONTROLLER SYSTEM



FOOD SAFETY

- More precise and reliable controls than an all-mechanical system for increased food safety
- Should there be an issue with the refrigeration system, operators will know instantly through error codes and data provided online

ENERGY SAVINGS

- Demand Defrost technology initiates defrosts only as needed for further energy savings
- Defrost time, when initiated, is also greatly shortened. Shorter defrost times also help protect food integrity.

INSTALLATION SAVINGS

- LogiTemp is already installed on the Capsule Pak refrigeration system so no additional installation is necessary

CONNECTIVITY

- Software loaded on each controller allows remote monitoring and programming using any device with a wireless internet or cabled (cat 5) connection*
- No need for a service tech to climb onto a roof or enter the walk-in to monitor or adjust the refrigeration system
- Constant data access allows users to improve refrigeration performance and avoid service issues

*Requires converter kit sold separately.

- Part no. 002768 converter kit for CAT5 connection
 - Part no. 002769 converter kit for wifi connection
- Each converter can monitor up to 32 controls.

All specifications within this publication subject to change without notice.