


# Kolpak Doors

Doors

Kolpak Doors



Steel frame construction and design

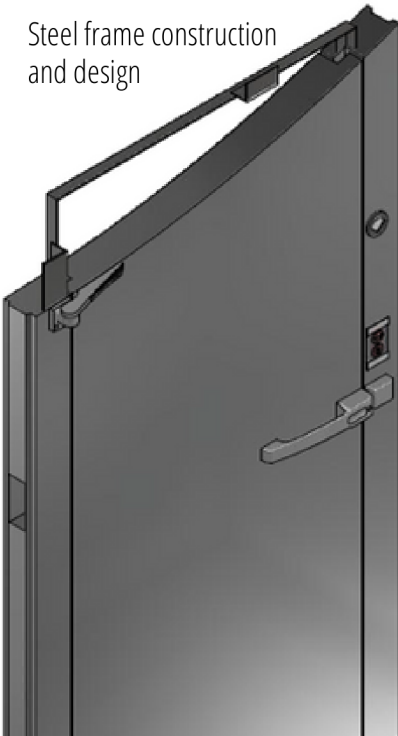

Hinge type and quantity may be determined by size of door

## Standard Features

- 100% foamed-in-place polyurethane panels (CFC and HCFC Free)
- UL, NSF, DOE, and EISA compliant
- Flush fit design with gasket for airtight seal
- Adjustable/spring-loaded hinges
- Heated air-vents on freezers, optional on coolers
- Extruded adjustable, flexible sweep gasket to assure seal along the bottom
- Impact resistance FRP (fiberglass reinforced plastic) door perimeter and jamb
- Steel Reinforced Door Jamb for maximum strength
- LED vapor-proof interior light with constant burn, low wattage night light. (OSHA approved application – additional switches not required)
- All freezers (5 watts heater) and optional coolers (1 watt heater) heater include an automatic thermostat control (Pepi) for automatic heat adjustment that allows optimal performance

## Specification

### Standard Door size 34" x 78"

Other widths: 26", 30", 36", 42", 48", 54", 60"

Other heights 66", 84", 96"

Special sizes may be available upon request

### Hardware & Accessories Packages

Standard hardware: 28 deadbolt handle, 1346 spring-loaded/ adjustable hinges, 1094 hydraulic door closer

Standard Accessories: 2" dial and switch with pilot light

Other Packages: Brushed/Polished, Oversized, Performer Advantage Brushed/Polished, Prison, and application packages for ADA, reach-in, weatherproof, or corrosive available

See door package specs for full details

### Metal Finishes

Standard Galvalume Interior and/or exterior

See Metal Sample Flyers for full listing